
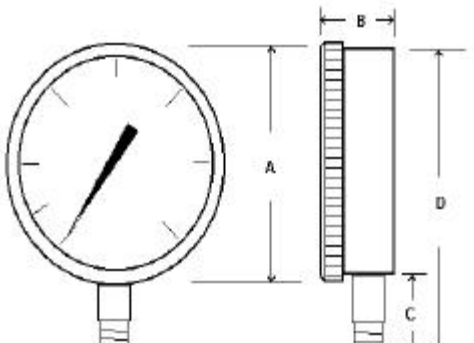



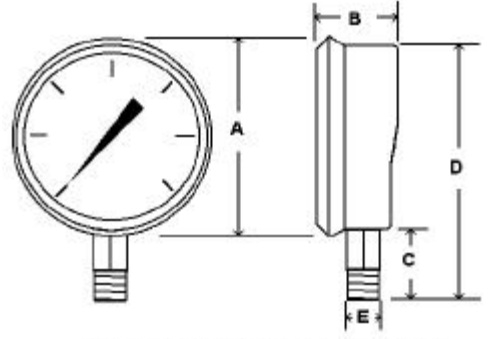
# PRECISION INSTRUMENT COMPANY

## AMMONIA GAUGES

### Steel Case and Internal Dry Type Ammonia Gauges

<b>SPECIFICATIONS:</b> <b>"401A" DRY</b> <ul style="list-style-type: none"> <li>• 2 1/2" or 3 1/2" Dial Size In Stock</li> <li>• 1/4" npt Connections</li> <li>• Grey Painted Steel Case *(Chrome Plated Steel Case Available)</li> <li>• Plastic Screw on Lens</li> <li>• Steel Internals &amp; Connection</li> <li>• Dry Only</li> <li>• 1.6 % Accuracy</li> </ul>																																																																				
<table border="1"> <thead> <tr> <th rowspan="2">PART NUMBERS</th> <th rowspan="2">DIAL SIZE</th> <th colspan="3">DIAL RANGE (PSI w/ Fahrenheit Equivalent)</th> </tr> <tr> <th>PRESSURE</th> <th>TEMPERATURE</th> <th>Dry/Filled</th> </tr> </thead> <tbody> <tr> <td>401A-254CF</td> <td>2 1/2"</td> <td>30/0/150</td> <td>-40-85° F</td> <td>DRY</td> </tr> <tr> <td>401A-254CH</td> <td>2 1/2"</td> <td>30/0/300</td> <td>-40-125° F</td> <td>DRY</td> </tr> <tr> <td>401A-354CF</td> <td>3 1/2"</td> <td>30/0/150</td> <td>-40-85° F</td> <td>DRY</td> </tr> <tr> <td>401A-354CH</td> <td>3 1/2"</td> <td>30/0/300</td> <td>-40-125° F</td> <td>DRY</td> </tr> </tbody> </table>					PART NUMBERS	DIAL SIZE	DIAL RANGE (PSI w/ Fahrenheit Equivalent)			PRESSURE	TEMPERATURE	Dry/Filled	401A-254CF	2 1/2"	30/0/150	-40-85° F	DRY	401A-254CH	2 1/2"	30/0/300	-40-125° F	DRY	401A-354CF	3 1/2"	30/0/150	-40-85° F	DRY	401A-354CH	3 1/2"	30/0/300	-40-125° F	DRY	<table border="1"> <thead> <tr> <th rowspan="2">Size</th> <th colspan="2">2 1/2" Dial</th> <th colspan="2">3 1/2" Dial</th> </tr> <tr> <th>Inches</th> <th>mm</th> <th>Inches</th> <th>mm</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>2.82"</td> <td>71.72</td> <td>3.87"</td> <td>98.37</td> </tr> <tr> <td>B</td> <td>1.18"</td> <td>30.14</td> <td>1.24"</td> <td>31.73</td> </tr> <tr> <td>C</td> <td>.88"</td> <td>22.47</td> <td>.92"</td> <td>23.58</td> </tr> <tr> <td>D</td> <td>3.49"</td> <td>88.67</td> <td>4.6"</td> <td>117.05</td> </tr> <tr> <td>E</td> <td colspan="2">1/4" NPT</td> <td colspan="2">1/4" NPT</td> </tr> </tbody> </table>		Size	2 1/2" Dial		3 1/2" Dial		Inches	mm	Inches	mm	A	2.82"	71.72	3.87"	98.37	B	1.18"	30.14	1.24"	31.73	C	.88"	22.47	.92"	23.58	D	3.49"	88.67	4.6"	117.05	E	1/4" NPT		1/4" NPT	
PART NUMBERS	DIAL SIZE	DIAL RANGE (PSI w/ Fahrenheit Equivalent)																																																																		
		PRESSURE	TEMPERATURE	Dry/Filled																																																																
401A-254CF	2 1/2"	30/0/150	-40-85° F	DRY																																																																
401A-254CH	2 1/2"	30/0/300	-40-125° F	DRY																																																																
401A-354CF	3 1/2"	30/0/150	-40-85° F	DRY																																																																
401A-354CH	3 1/2"	30/0/300	-40-125° F	DRY																																																																
Size	2 1/2" Dial		3 1/2" Dial																																																																	
	Inches	mm	Inches	mm																																																																
A	2.82"	71.72	3.87"	98.37																																																																
B	1.18"	30.14	1.24"	31.73																																																																
C	.88"	22.47	.92"	23.58																																																																
D	3.49"	88.67	4.6"	117.05																																																																
E	1/4" NPT		1/4" NPT																																																																	

### All Stainless Steel Liquid Filled Ammonia Gauges

<b>SPECIFICATIONS:</b> <b>"AMMONIA-LF" LIQUID FILLED</b> <ul style="list-style-type: none"> <li>• 2 1/2" or 4" Dial Size in Stock</li> <li>• 1/2" npt Connection</li> <li>• Stainless Steel Case &amp; Bezel</li> <li>• Polycarbonate Lens</li> <li>• 316SS Internals &amp; Connection</li> <li>• Liquid Filled (Dry Available)</li> <li>• 1 % ACCURACY</li> </ul>																																																																				
<table border="1"> <thead> <tr> <th rowspan="2">PART NUMBERS</th> <th rowspan="2">DIAL SIZE</th> <th colspan="3">DIAL RANGE (PSI w/ Fahrenheit Equivalent)</th> </tr> <tr> <th>PRESS</th> <th>TEMP.</th> <th>Dry/Filled</th> </tr> </thead> <tbody> <tr> <td>AMMONIA-LF-254CF</td> <td>2 1/2"</td> <td>30/0/150</td> <td>-40-85° F</td> <td>FILLED</td> </tr> <tr> <td>AMMONIA-LF-254CH</td> <td>2 1/2"</td> <td>30/0/300</td> <td>-40-125° F</td> <td>FILLED</td> </tr> <tr> <td>AMMONIA-LF-404CF</td> <td>4"</td> <td>30/0/150</td> <td>-40-85° F</td> <td>FILLED</td> </tr> <tr> <td>AMMONIA-LF-404CH</td> <td>4"</td> <td>30/0/300</td> <td>-40-125° F</td> <td>FILLED</td> </tr> </tbody> </table>					PART NUMBERS	DIAL SIZE	DIAL RANGE (PSI w/ Fahrenheit Equivalent)			PRESS	TEMP.	Dry/Filled	AMMONIA-LF-254CF	2 1/2"	30/0/150	-40-85° F	FILLED	AMMONIA-LF-254CH	2 1/2"	30/0/300	-40-125° F	FILLED	AMMONIA-LF-404CF	4"	30/0/150	-40-85° F	FILLED	AMMONIA-LF-404CH	4"	30/0/300	-40-125° F	FILLED	<p>"AMMONIA-LF" LIQUID FILLED VERSION</p> <table border="1"> <thead> <tr> <th rowspan="2">Size</th> <th colspan="2">2 1/2"</th> <th colspan="2">4"</th> </tr> <tr> <th>Inches</th> <th>mm</th> <th>Inches</th> <th>mm</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>2.73"</td> <td>69.40</td> <td>4.34"</td> <td>110.41</td> </tr> <tr> <td>B</td> <td>1.36"</td> <td>34.55</td> <td>1.62"</td> <td>41.24</td> </tr> <tr> <td>C</td> <td>1.00"</td> <td>25.40</td> <td>5.30"</td> <td>134.69</td> </tr> <tr> <td>D</td> <td>3.46"</td> <td>88.00</td> <td>1.47"</td> <td>37.39</td> </tr> <tr> <td>E</td> <td colspan="2">1/4" NPT</td> <td colspan="2">1/4" NPT</td> </tr> </tbody> </table>		Size	2 1/2"		4"		Inches	mm	Inches	mm	A	2.73"	69.40	4.34"	110.41	B	1.36"	34.55	1.62"	41.24	C	1.00"	25.40	5.30"	134.69	D	3.46"	88.00	1.47"	37.39	E	1/4" NPT		1/4" NPT	
PART NUMBERS	DIAL SIZE	DIAL RANGE (PSI w/ Fahrenheit Equivalent)																																																																		
		PRESS	TEMP.	Dry/Filled																																																																
AMMONIA-LF-254CF	2 1/2"	30/0/150	-40-85° F	FILLED																																																																
AMMONIA-LF-254CH	2 1/2"	30/0/300	-40-125° F	FILLED																																																																
AMMONIA-LF-404CF	4"	30/0/150	-40-85° F	FILLED																																																																
AMMONIA-LF-404CH	4"	30/0/300	-40-125° F	FILLED																																																																
Size	2 1/2"		4"																																																																	
	Inches	mm	Inches	mm																																																																
A	2.73"	69.40	4.34"	110.41																																																																
B	1.36"	34.55	1.62"	41.24																																																																
C	1.00"	25.40	5.30"	134.69																																																																
D	3.46"	88.00	1.47"	37.39																																																																
E	1/4" NPT		1/4" NPT																																																																	